

C45LPO 225/100

Specificaties / Spécifications Spezifikationen / Specifications

Sterkteklasse / Classe de résistance Festigkeitsklasse / Strength class	C55/67
Milieuklasse / Classe d'exposition Expositionsklasse / Exposure class	XC4, XS3, XD3, XF4, XA3
Omgevingsklasse / Classe d'environ- nement Umweltklasse / Environmental class	EE4, ES4, EA3
Absorptie / Absorption Absorption / Absorption	< 5 %
Gewicht / Poids Gewicht / Weight	1196 kg

A. Vlak - vlak
A. Plat - plat
A. Ebene - Ebene
A. Flat - flat

B. Smaller voor eenvoudige installatie
B. Plus étroit pour pose aisée
B. Schmäler für einfaches Verlegen
B. Narrower for easy installation


Linteweversstraat 21
Industriezone II
7780 Komen, Belgium
T +32 (0)56 55 48 53
E info@cobefa.be
www.cobefa.be

V022025






2x Deha 2.5T

Stortzijde / Côté coulage
Gussseite / Casting side



Afwerking SB3
Finition SB3
Verarbeitung SB3
Finishing SB3

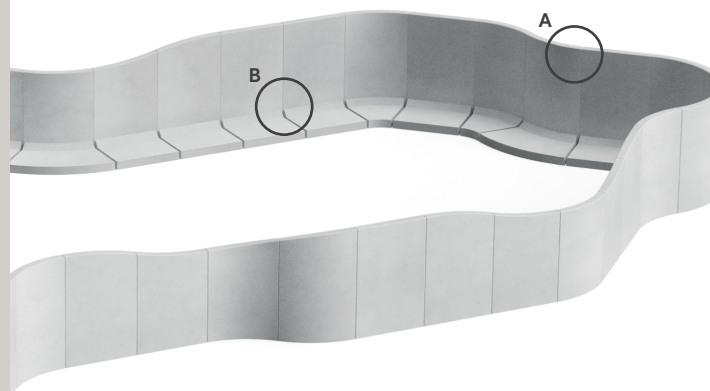

C45LPO 225/100

